


EXC  **POWER**
WENZHOU IGNENG TECHNOLOGY CO.,LTD

EXC  **POWER**

WENZHOU IGNENG TECHNOLOGY CO.,LTD

 0086-577-86663565
 +86 15985181713
 www.exc-power.com
 sales@exc-power.com

 Jinhai Sandao, Xinghai Street
Coastal Development Zone,
Longwan District, Wenzhou, China

PRODUCT MANUAL

APPLIANCE PROTECTOR

Professional Manufacturer
For voltage Protectors, Multifunctional Sockets, Inverters

COMPANY INTRODUCTION

Wenzhou Igneng Technology Co., Ltd, is a trading and manufacturing combo since 2006, located in Wenzhou with strong Zhengshang Culture. Our main products are :Inverters, Voltage protectors, Street Lighting Control, Multifunctional sockets such as Timer, Remote and Wifi control sockets.

Since started, We have always been committed to technology leadership and quality first. Besides, we always adhere to efficiency priorities and share results. In the meanwhile, we always adhere to people-oriented, customer-centric.

Adhering to the business philosophy of "integrity, win-win, innovation and high efficiency", we have gradually developed steadily and has become a comprehensive high-tech enterprise integrating R&D, manufacturing, sales and service.

CONTENTS

HOME APPLIANCES GUARD

1

UK Plug AVP	02~03 , 07~12 , 17~18 , 20~24 , 25
American Plug AVP	03 , 20~21
European Plug AVP	04 , 24
Wiring Type AVP	05~06 , 09~10 , 18
South African Plug AVP	06~07 , 19 , 26
Global Applicable AVP	12~16

MULTIFUNCTIONAL SOCKET

27

On Off Timer	28
Remote Control Socket	28~30
USB Wall Socket	30~32
Doorbell	32~34
WIFI Control Switch & Socket	33~35

INVERTER

36

Inverter	37~41
Solar Controller	42~45



STREET LIGHTING CONTROL

46

Light Control Sensor	47~48
Photo-electric street lighting control	49



MULTIFUNCTIONAL SOCKET



EP-T001 Timer



PRODUCTS SPECIFICATION

Operating Voltage	120V/110V AC
Output capacity	10A, 1200W
Operating Frequency	50Hz-60Hz
Delay time	30M~24hours
Travel time error	±10M
Operation direction	Clockwise
Operating Humidity	≤ 90% RH
Material	PC and ABS Shell
Max Ambient	0°C~45°C



EP-RF-01-F Remote Control Socket



PRODUCTS SPECIFICATION

Operating Voltage	220V AC
Output capacity	5A, 1100W
Operating Frequency	50Hz-60Hz
Remote Range	30M
Launcher	3V DC
Battery	CR2032 3V DC
Material	PC and ABS Shell
Operating Humidity	≤ 90% RH
Temperature	-5°C~55°C





EP-RF-01-G
Remote Control Socket



PRODUCTS SPECIFICATION

Operating Voltage	220V AC
Output capacity	5A, 1100W
Operating Frequency	50Hz-60Hz
Remote Range	30M
Launcher	3V DC
Battery	CR2032 3V DC
Material	PC and ABS Shell
Operating Humidity	≤ 90% RH
Temperature	-5°C~55°C



EP-RF-03-G
Remote Control Socket



PRODUCTS SPECIFICATION

Operating Voltage	220V AC
Output capacity	5A, 1100W
Operating Frequency	50Hz-60Hz
Remote Range	30M
Launcher	3V DC
Battery	CR2032 3V DC
Material	PC and ABS Shell
Operating Humidity	≤ 90% RH
Temperature	-5°C~55°C



EP-RF-02-US
Remote Control Socket



PRODUCTS SPECIFICATION

Operating Voltage	220V AC
Output capacity	5A, 1100W
Operating Frequency	50Hz-60Hz
Remote Range	30M
Launcher	3V DC
Battery	CR2032 3V DC
Material	PC and ABS Shell
Operating Humidity	≤ 90% RH
Temperature	-5°C~55°C



EP-USB003
USB Wall Socket



PRODUCTS SPECIFICATION

Operating Voltage	100V-240V AC
Output capacity	10A
Operating Frequency	50Hz-60Hz
2USB output	DC5.0V/2100mA
AC Socket	Universal 3 pin + 2pin
Material	PC and ABS Shell
Operating Humidity	≤ 90% RH
Temperature	-5°C~55°C





EP-USB004



PRODUCTS SPECIFICATION

Operating Voltage	110-250V AC
Operating Frequency	50Hz-60Hz
2USB output	5.0V DC
Output Current	2100mA
Material	PC and ABS Shell
Operating Humidity	≤ 90% RH
Working Temperature	-10°C~70°C



EP-USB006



PRODUCTS SPECIFICATION

Operating Voltage	110-250V AC
Operating Frequency	50Hz-60Hz
4USB output	5.0V DC
Output Current	2100mA
Material	PC and ABS Shell
Operating Humidity	≤ 90% RH
Working Temperature	-10°C~70°C



EP-USB005



PRODUCTS SPECIFICATION

Operating Voltage	110V-250V AC
Operating Frequency	50Hz-60Hz
3USB output	5.0V DC
Output Current	2100mA
Material	PC and ABS Shell
Operating Humidity	≤ 90% RH
Temperature	-10°C~70°C



EP-W021 Doorbell



PRODUCTS SPECIFICATION

Work Voltag	12V DC
Volume	65-110DB
Distance	200m
Music	64 chords
AC Socket	PC and ABS Shell
Operating Humidity	≤ 90% RH
Temperature	-5°C~55°C





EP-W022
Doorbell

PRODUCTS SPECIFICATION



Work Voltag	12V DC
Volume	65-110DB
Distance	200m
Music	64 chords
Frequencg	315/433.92Mhz
AC Socket	ABS Shell
Operating Humidity	≤ 90% RH
Temperature	-5°C~55°C



EP-W023-EU
Doorbell

PRODUCTS SPECIFICATION



Work Voltag	220 AC
Volume	65-110DB
Distance	200m
Music	64 chords
Frequencg	315/433.92Mhz
AC Socket	ABS Shell
Operating Humidity	≤ 90% RH
Temperature	-5°C~55°C



EP-W023-US
Doorbell

PRODUCTS SPECIFICATION



Work Voltag	120V DC
Volume	65-110DB
Distance	200m
Music	64 chords
Frequencg	315/433.92Mhz
AC Socket	PC and ABS Shell
Operating Humidity	≤ 90% RH
Temperature	-5°C~55°C



EP-WF001




PRODUCTS SPECIFICATION



Operating Voltage	110-240V AC
Operating Frequency	15A,3250W
Operating Frequency	50Hz-60Hz
Wifi	2.4GHz
Distance	≥30M
Wireless Networkl	802.11 b/g/n
Material	PC and ABS Shell
Operating Humidity	≤ 90% RH
Working Temperature	-10°C~70°C



EP-WF002

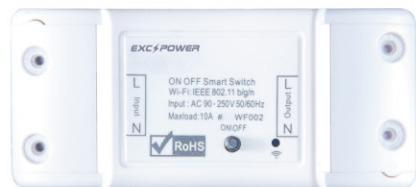

PRODUCTS SPECIFICATION

Input power	90-250V AC
Output capacity	10A,2200W
Operating Frequency	50Hz-60Hz
Wireless Network	802.11 b / g / n
Material	PC and ABS Shell
Operating Humidity	≤ 90% RH
Temperature	-10°C~70°C



WATER HEATER



PROJECTOR



SOUND



TV/VIDEO



REFRIGERATOR



MOBILE PHONES



AIR CONDITION

EP-WF003



PRODUCTS SPECIFICATION

Operating Voltage	100-250V AC
Output capacity	16A,1700W
Operating Frequency	50Hz-60Hz
Wireless Network	802.11 b / g / n
Material	PC and ABS Shell
Operating Humidity	≤ 90% RH
Working Temperature	-10°C~70°C



WATER HEATER



PROJECTOR



SOUND



TV/VIDEO



REFRIGERATOR



MOBILE PHONES



AIR CONDITION

INVERTER

